

## Membrane Element

## ULP-2540

### Performance

Permeate Flow: 800 gpd (2.84m<sup>3</sup>/d)  
 Salt Rejection: 99.0% (98% minimum)

### Type

Configuration: Spiral Wound  
 Membrane Polymer: Composite Polyamide  
 Membrane Active Area: 30 ft<sup>2</sup> (2.8m<sup>2</sup>)

### Application Data\*


Maximum Applied Pressure: 600 psig (4.14 MPa)  
 Maximum Chlorine Concentration: < 0.1 PPM  
 Maximum Operating Temperature: 113 °F (45 °C)  
 pH Range, Continuous (Cleaning): 2-10.6 (1-12)\*  
 Maximum Feedwater Turbidity: 1.0 NTU  
 Maximum Feedwater SDI (15 mins): 5.0  
 Maximum Feed Flow: 16 GPM (3.6 m<sup>3</sup>/h)  
 Minimum Ratio of Concentrate to Permeate Flow for any Element: 5:1  
 Maximum Pressure Drop for Each Element: 10 psi

\* The limitations shown here are for general use. For specific projects, operating at more conservative values may ensure the best performance and longest life of the membrane.

### Test Conditions

The stated performance is initial (data taken after 30 minutes of operation), based on the following conditions:

1500 PPM NaCl solution  
 150 psi (1.05 MPa) Applied Pressure  
 77 °F (25 °C) Operating Temperature  
 15% Permeate Recovery  
 6.5 - 7.0 pH Range

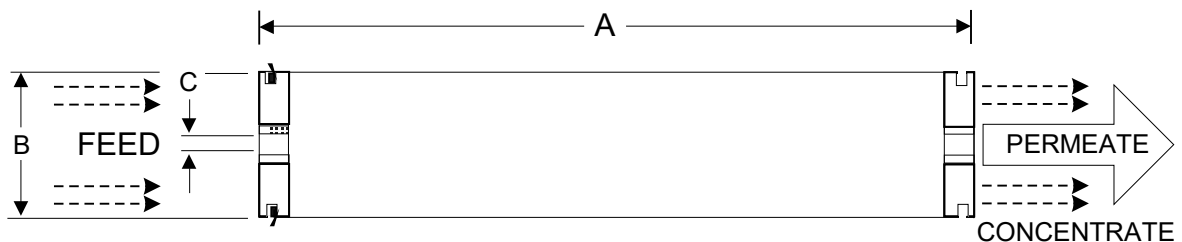

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	3.95 (100.3)	0.75 (19.1)	8 (3.6)

**Notice:** Permeate flow for individual elements may vary + or - 15 percent. Membrane active area may vary +/-4%. Element weight may vary. All membrane elements are supplied with a brine seal, interconnector, and o-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.