



The Jumbo filter housing accept a wide variety 4.5" nominal 10" and 20" length filters.
 It also allows greater cartridge capacity for high flow applications.
 The high flow polypropylene cap allows greater volume of liquid to pass through the cap more rapidly.

FOR LARGE-CAPACITY, HIGH FLOW APPLICATIONS



JUMBO HEAVY DUTY SERIES FILTER HOUSINGS

- Manufactured from Polypropylene
- As pre-treatment or general filtration
- EPDM double o-ring seal
- Available in wide range of model and port size
- Sumps are constructed of reinforced polypropylene in 10" and 20" length
- Polypropylene cap is available with 1/2", 3/4", 1" and 1.5" inlet and outlet ports
- Available with or without a pressure relief valve

Housing Specifications and Performance Data		
Model	Maximum Dimensions	Initial (PSI) Flow Rate (l/min)
#20 Jumbo	23 3/8" x 7 1/4" (594mm*184mm)	20 psi 3363(l/min)
#20 Jumbo Copper sets	23 3/8" x 7 1/4" (594mm*184mm)	20 psi 3363(l/min)

Materials of Construction	Jumbo	Jumbo Copper sets
Upper cover	Polypropylene	Polypropylene
O-Ring	EPDM	EPDM
Bottle body	Polypropylene	Polypropylene
button assembly	SUS304 & Polypropylene	SUS304 & Polypropylene

Test Value

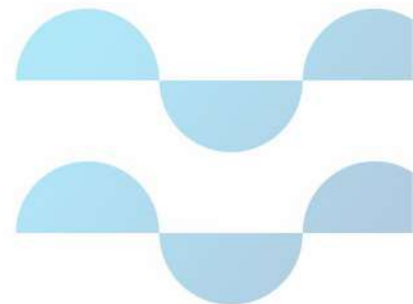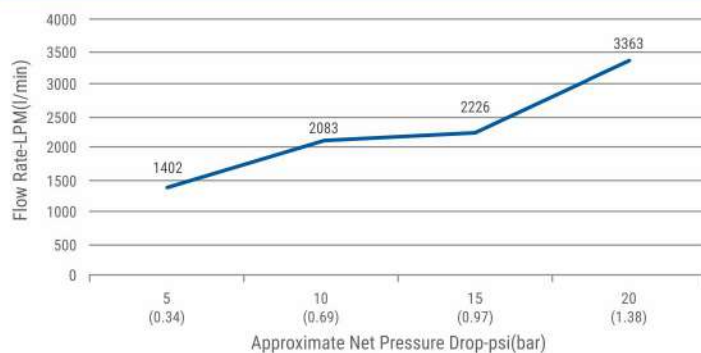

FLUXTEK INTERNATIONAL CORP

NO 21, jingjian Road, Pingtung City, 90093, Taiwan (R.O.C)

Tel: 886-8-7558557

Fax: 886-8-7555055

jack@fluxtek.com

www.fluxtek.com

